


T H E R M O M E T R I C S
A COMMITMENT TO EXCELLENCE
AN AMPHENOL COMPANY

Exhaust Gas Recirculation (EGR) Sensor

CTTS-400328-F01

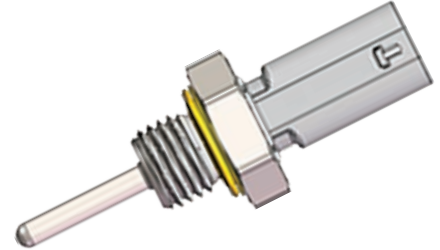

Description

The **Thermometrics Automotive Exhaust Gas Recirculation (EGR) Sensor** is used to detect the operating temperature of the exhaust pipe to determine operating conditions and potential system failures. This sensor can be used in the exhaust gas and the low temperature sensor is used in the in-take air stream. Designed for fast response, optimized for thermal dissipation and suitable for high vibration and corrosive environments.

Features

- Operating temperature range: -40 ~ 300°C
- USCAR 1.2mm sealed connection system IP69K
- M12x1.5-6g thread
- SUS304L steel body and SUS316L tube
- Existing field proven design
- High accuracy and long-term stability
- Compliance with RoHS
- Extremely fast response
- Copper gasket sealing

Applications


- Exhaust pipe temperature monitor
- Air in-take temperature monitor



Amphenol
Sensors

EGR Sensor Specifications (CTTS-400328-F01)

Dimensions

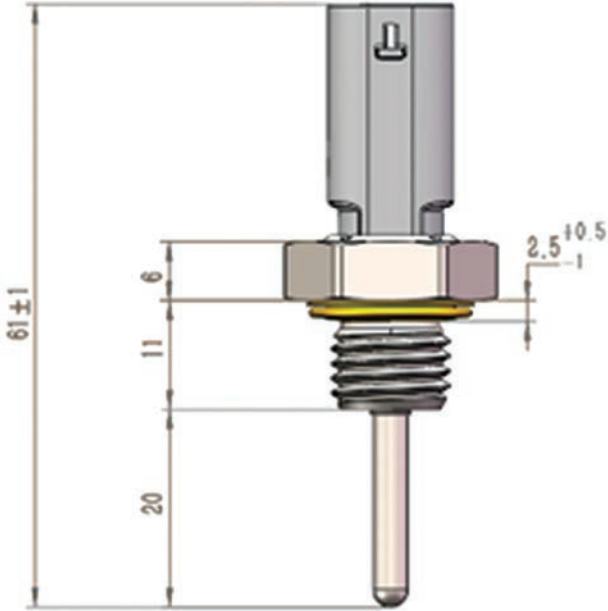

Resistance vs. Temperature			
TEMP (°C)	Resistance Low (KΩ)	Resistance Nominal (KΩ)	Resistance High (KΩ)
-40	123.6	134.7	146.8
0	31.6	33.88	36.28
25	16.11	17.13	18.2
50	9.074	9.58	10.11
100	3.582	3.74	3.902
130	2.276	2.363	2.452
180	1.21	1.247	1.284
200	0.9674	0.9998	1.032
300	0.3921	0.4093	0.4268

Operating Temperature Range

-40°C to 300°C

Storage Temperature Range

-40°C to 100°C

R180 @ 180°C

R180 = 1.247KΩ ± 3%

B Value

Beta (25/50)°C = 2240K ± 1%

Response Time

T63 ≤ 10 seconds

Gasket Material

Copper

Connector

TE 2-1718643-1

Part No.

CTTS-400328-F01



Amphenol
Sensors

www.amphenol-sensors.com

© 2026 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-829A 06/2026