


CR1 – A Breakthrough in Thermistor Coating for Harsh Environment Applications

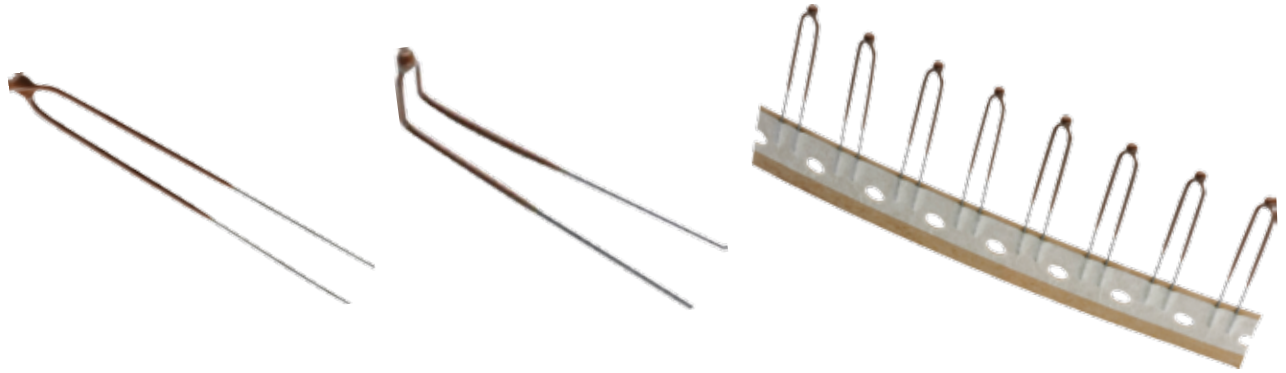

What distinguishes the CR1 from other available coatings:

Conventional coatings for environmental protection and insulation of thermistors are usually a compromise in terms of performance.

Epoxy encapsulation gives good thermal shock properties and corrosion resistance but poor flexibility, limited temperature performance and slow time response.

Silicone coatings by contrast perform well up to 200°C, are flexible and allow tight dimensional control for fast time response but are limited in their thermal shock performance and resistance to acids.

The use of CR1 in the current innovation overcomes these limitations and addresses a need for improved protection for temperature sensors in harsh environments, such as Euro 6 compliant emission reduction systems in diesel engines.

Technical advantages of CR1:

Chemical resistance in harsh environments is one of the fundamental performance advantages of CR1. The coating is resistant to a wide range of acids, fuels, solvents and moisture. Heat resistance up to ~300°C is possible although the part is usually limited by the melting point of the solder used to attach lead wires to the thermistor.

A proprietary Amphenol Advanced Sensors process allows the polymer to exceed the voltage standoff requirement for automotive sensors, with associated advantages for coating thickness reduction. Coating with CR1 allows accurate dimensional control of the coated thermistor giving fast thermal time response. The tensile strength of CR1 [$>4x$ that of silicone] extends thermal shock performance and ensures good mechanical integrity of the thermistor chip package.

Mechanical flexibility enables the thermistor lead wires to be formed once the protective coating has been applied, for example when over-moulding or inserting into a sensor housing. The low level of porosity in the polymer structure gives good moisture resistance, which is important for applications where condensation or high humidity are present such as air conditioning condenser units.

CR1 – A Breakthrough in Thermistor Coating for Harsh Environment Applications

Benefits of CR1 Coating:

- AEC-Q200 Rev D qualified
- Acid/Gasoline/Diesel/Biofuel/Urea resistant
- High temperature performance up to 190°C
- High thermal shock resistance
- Water immersion
- Insulation: up to 1000V DC at 25°C
- Flexibility: 180° bend around 1mm mandrel

Economic advantages of CR1 coating technology:

- An alternative to glass encapsulated devices – solves glass/metal interface corrosion problems
- CR1 may be exposed to corrosive environments where over moulding or potting of standard sensors is normally required
- Automated production process using established coating technology minimises cost and ensures product quality, through 100% digital image inspection

Amphenol
Advanced Sensors

www.amphenol-sensors.com

Registered Office: Amphenol Thermometrics (UK) Ltd,
Crown Industrial Estate, Priorswood Road, Taunton, TA2 8QY, England
Registered in England No: 2310013

© 2015 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.

AAS-939-171A 06/2015